

Quick Installation Guide



- 1 Power Button
- 2 4 IN 1 Card Reader
- 3 USB Connector
- 4 Microphone Jack/Headphone Jack
- 5 HDMI Connector
- 6 VGA Connector
- 7 eSATA Connector
- 8 USB Connector
- 9 S-Video Connector
- 10 LAN
- 11 TV-Tuner Connector
- 12 Microphone Jack/Headphone Jack/Line In Jack

1 Installation of Hard Disk Drive



A-1. Align the screw driver into the screw hole.



A-2. Use a flat head screw driver to align on the opening.



A-3. Raise the panel away from the system.



A-4. Have the system lie flat on the table.



B-1. The HDD compartment is shown on the illustration.



B-2. Use a screw driver to remove the screws attach to the HDD.



B-3. Push the HDD away from its compartment.



B-4. Raise the HDD away from its compartment.



C-1. Locate the two screws and the HDD holder.



C-2. Insert the holder into the HDD.




C-3. Align the screw hole on both the HDD and holder. Screw it tightly until it is lock.



C-4. Align the compartment door into the door into the front of the HDD.



C-5. Screw back the two screw on both sides of the HDD.

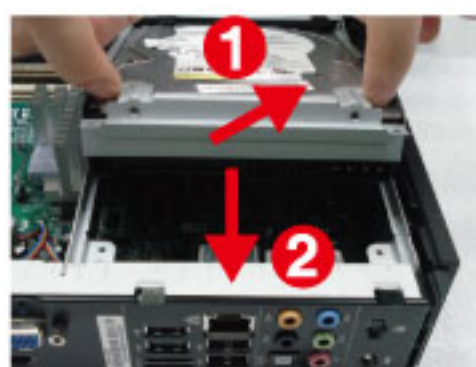

D-1. Align back the HDD into its compartment slot.



D-2. Push to secure the HDD into the compartment.



D-3. Lock the HDD into its compartment with the two screws.

2 Installation of Memory



1. The slot for the RAM module



2. Carefully align the RAM into its slot and press down firmly.



3 Installation of CPU



1. Set CPU into Socket



2. Lock Heatsink in MB



4 Installation of the Wireless Card



1. The wireless card and screws
option: Nonstandard shipment spec




2. The slot for wireless card module



3. Connect the cable to the wireless card



4. Carefully align the wireless card into its slot and press down firmly

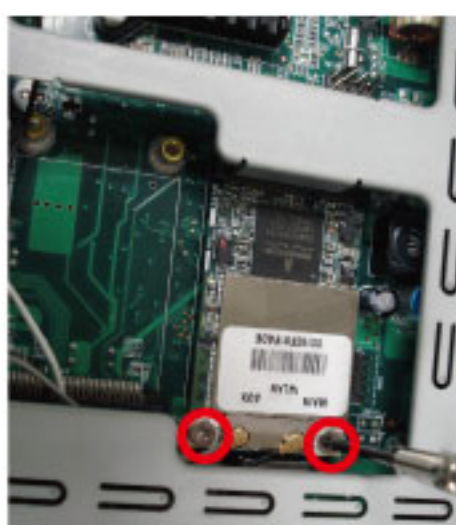

5. Align the screw hole on both the wireless card and boss. Screw it tightly until it is lock

5 Installation of the TV-Tuner Card



1. The TV-Tuner card and screws
option: Nonstandard shipment spec



2. The slot for TV-Tuner card module



3. Connect the cable to TV-Tuner card



4. Carefully align the TV-Tuner card into its slot and press down firmly




5. Align the screw hole on both TV-Tuner card and boss. Screw it tightly until it is lock

6 Installation of the Stand



1. Locate the stand from the package.

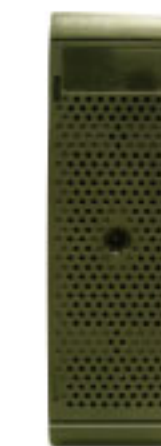

2. Carefully align the stand to the hole on the computer.



3. Use a screw to lock up the stand into the computer.